

X1 output 1-2




X4 output 3-4

SB-REL6-3S.230V  
fan -out module for 4x 3step motors

## Technical Data

Plug terminal	max. 2,5 mm <sup>2</sup>
Relay coil	24V DC, 24V AC, 230V AC please order coil voltage
Relay contact	250V AC, max. 8A
Operating / storage temperature	-10 - +50°C / -30 - +80°C
Construction	PCB, TS35, EN50022
Dimensions (BxHxT) / weight	71 x 101 x 50 mm / 200g

Input X5

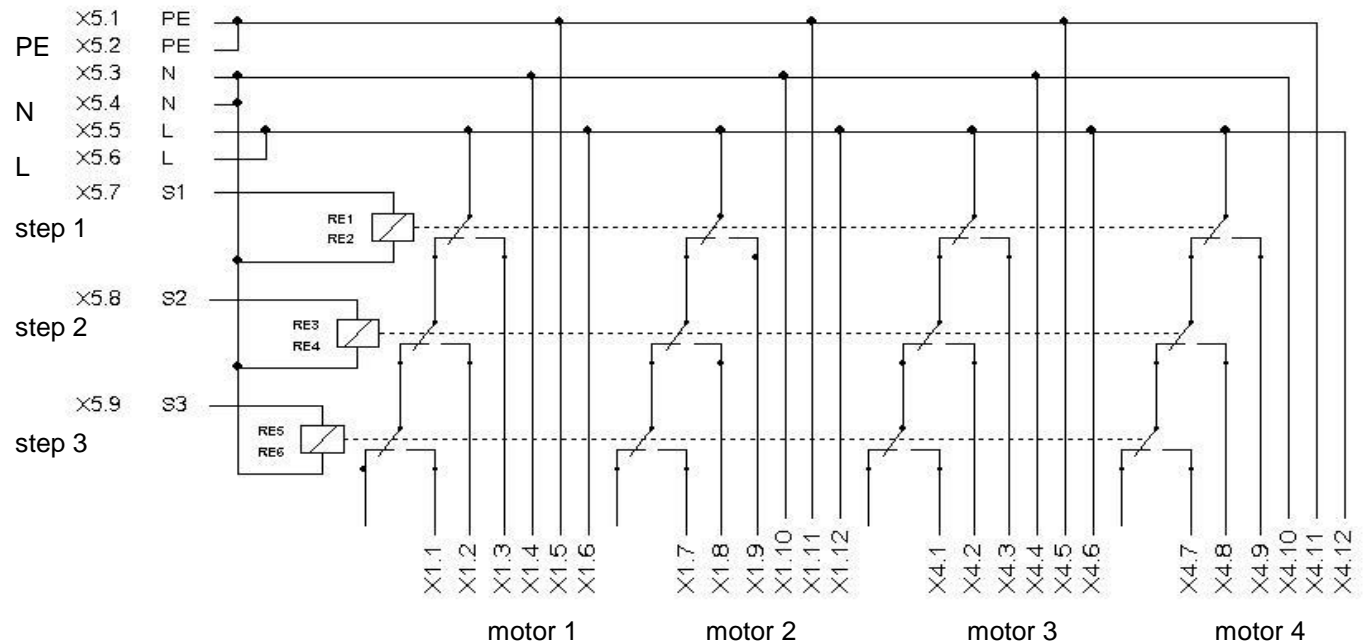

### RINCK ELECTRONIC GMBH

Kleekamp 6  
D-27356 Rotenburg (Wümme)  
[www.rinck-electronic.de](http://www.rinck-electronic.de)  
[info@rinck-electronic.de](mailto:info@rinck-electronic.de)

**S 161**

D\_SB-REL6-3S

23.03.15

### MODULE, 4x MOTOR DRIVER 3 STEPS, SB-REL6-3S

Control device for 4 motor outputs with 3 step motors

Input	3x relays (step 1-2-3) ← order relay coil voltage
Output	4x 3 step contacts (4 channel) max. 250V AC
Anwendung	3-step controlling module for motors, fan motors,